



**County Engineer  
Environmental Engineer  
Building Department**  
233 W. Sixth Street  
Marysville, Ohio 43040  
P 937. 645. 3018  
F 937. 645. 3161  
[www.co.union.oh.us/engineer](http://www.co.union.oh.us/engineer)

**Marysville Operations Facility**  
16400 County Home Road  
Marysville, Ohio 43040  
P 937. 645. 3017  
F 937. 645. 3111

**Richwood Outpost**  
190 Beatty Avenue  
Richwood, Ohio 43344

---

*Public Service with integrity*

## **ADDENDUM #3**

FROM: Union County Engineers Office  
Josh Holtschulte

DATE: April 16, 2021

RE: **UNI-TR283-0.734 Bridge Replacement**

PAGES (including cover): 1


---

This addendum supplements and amends the original Drawings and Specification issued and shall be taken into account in preparing proposals, and shall become a part of the Contract Documents.

1. The attendance sheet from the pre-bid meeting on April 16, 2021 is attached. Discussion points and answers to questions raised in the meeting are included in the items of this addendum.
2. Trees have been removed. The stumps remain and shall be responsibility of the DBT.
3. Asphalt to the east of the bridge shall be full width and full depth over the entire length to the intersection.
4. Hydraulic analysis is not required.
5. Guardrail shown on plan is for conceptual purposes. Guardrail shall be designed by the DBT based on length of need.
6. A permit has been submitted to the Army Corps of Engineering for temporary construction access fills. We expect to receive a Nationwide Permit, possibly just after the bid opening. For purposes of the bid the DBT shall bid the project assuming a Nationwide Permit.
7. Proposal Note 555 (smoothness measurements) will not be required.
8. The use of SWPPPTrack software is not required.
9. There is no DBE requirement.
10. Existing field drive shall be reconstructed to include a 30' long drive pipe. The drive pipe shall be 24". Should the DBT determine that the 24" pipe is not feasible to fit the site, 2-18" pipes would be an acceptable alternative.

11. Foundations shall be drilled shafts. No alternative foundation types will be allowed.
12. Geotechnical/soil profile plan sheets will not be required.
13. Any further questions will be accepted in writing through April 23, 2021 and answered in a final addendum.

**Please note and sign the bottom portion of 6.7 of the bid packet proposal acknowledging that this Addendum was received.**

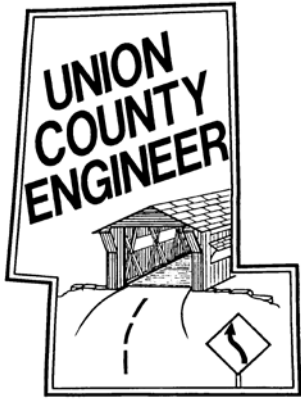

# UNI TR283-0.734 Wallace Road Bridge Replacement

Pre-Bid Conference  
Friday, April 16, 2021 @ 10:00am  
**SIGN-IN SHEET**

**NAME**

**COMPANY**

Sean Wade

Eagle Bridge

Steve Smith

Terracon Consulting

Jeff Yoder

Poggemeyer Design

Tom Less

Woolpert

Whitey Florence

R&I Construction

Jeff Stauch

Engineer's Office

Josh Holtschulte

Engineer's Office

Jessica Cain

Engineer's Office

Douglas Miller

Brumbaugh Engineering

---

---

---

---

---